


Datum PSM4900/500

X1.1

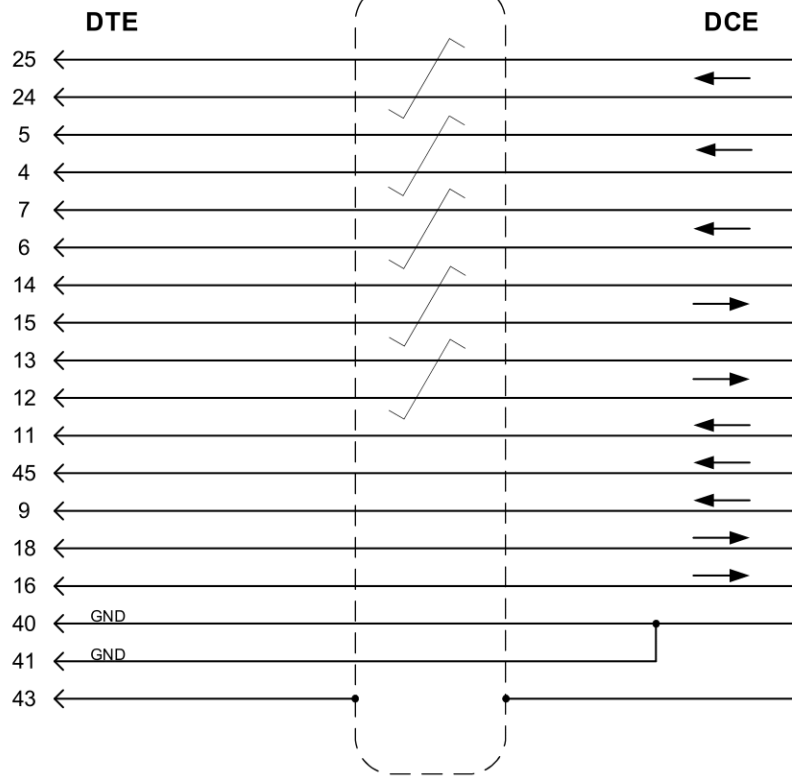


X2

| PIN № | Название сигнала | ССИТТ V.35 |
|-------|------------------|------------|
| 8 | RxC (A) | 115 |
| 26 | RxC (B) | 115 |
| 5 | TxC (A) | 114 |
| 23 | TxC (B) | 114 |
| 6 | RxD (A) | 104 |
| 24 | RxD (B) | 104 |
| 4 | TxD (A) | 103 |
| 22 | TxD (B) | 103 |
| 17 | CLK (A) | 113 |
| 35 | CLK (B) | 113 |
| 9 | CTS | 106 |
| 13 | DCD | 109 |
| 11 | DSR | 107 |
| 7 | RTS | 105 |
| 12 | DTR | 108 |
| 19 | S.GND | 102 |
| 1 | P.GND | 101 |


X1 – MD-50M (вилка AMPLIMITE.050)

X2 – DB-37M (вилка)

Длина кабеля – 3м.



X1.2



Подключение DCE оборудования "Datum PSM4900/500" к УПИ-2 (V.35)